

# 4G WIRELESS ROUTER

PLUG & ONLINE

HF-BT001-DG



## Product Features

- ≥ LTE CAT4
- ≥ 2.4GHz 1\*1MIMO Up to 72.2Mbps
- ≥ LED Indicator
- ≥ 2100mAh removable battery



An ISO 9001:2008 Certified Company



**4G WIRELESS ROUTER**  
**PLUG & ONLINE**




Support Multiple devices connecting at the same time free driver, convenient

UP TO  
**150 MBPS**



## APPLICATION

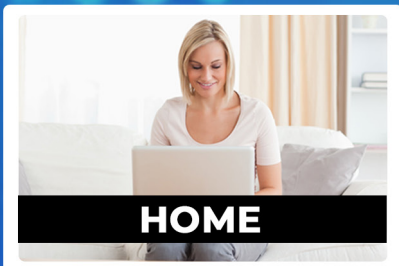

## Specifications:

### LTE WAN Feature

Frequency Bands	FDD-LTE B1/B3/B5/B7/B8/B20/B28 TDD-LTE B38/B40/B41; WCDMA B1/B5/B8;
Bandwidth	LTE Band: 1.4/3/5/10/15/20 MHz, comply with 3GPP
Modulation	DL: QPSK/16-QAM/64-QAM, comply with 3GPP UL: QPSK/16-QAM, comply with 3GPP
LTE Antenna	Primary and Diversity 2*2 MIMO, Internal
RF Level	LTE-FDD: Power Class 3 (23 dBm + 2.7/-3.7dB) LTE-TDD: Power Class 3 (23 dBm + 2.7/-3.7dB) UMTS: Power Class 3 (24 dBm +1.7/-3.7dB)
Data Rate	4G: 3GPP R9 Cat4, DL/UL up to 150Mbps/50Mbps 3G: 3GPP R7 DL/UL up to 21Mbps/5.76Mbps

### WLAN Feature

WiFi Standard	802.11b/g/n, 2.4GHz, 20MHz Auto or select channel from 1 to 13
Antenna	1x1, Internal
Connection Availability	Support Max users 10



WiFi Data Rate

- 802.11b: Up to 11 Mbps
- 802.11g: Up to 54 Mbps
- 802.11n: Up to 72.2 Mbps

## Hardware Parameter

Dimension	98.5*59.3*14.9 mm(L×W×H)
Net weight	83.5g
Working Temp	-20°C to 45°C
Storing temp	-20°C to 60°C
Power adapter	5V/1A
Battery Capacity	2100 mAh (Default), Li-on Battery
Display	LED Indicator
Key/Interface	POWER/RESET, Micro-USB
SIM Interface	ESIM EUICC, USIM Micro-SIM (3FF)



An ISO 9001:2008 Certified Company