


## HF-S08G2-120WH



### Product Features:

- ≥ 8\*10/100Mbps PoE RJ45 ports (port1~port8)
- ≥ 2\*10/100/1000Mbps RJ45 ports (port9~port10)
- ≥ Max poe power: 7/8th ports max 60W; 1-6th ports max 30W
- ≥ Maximum power of PoE: 120W
- ≥ All ports support 6KV lightning protection

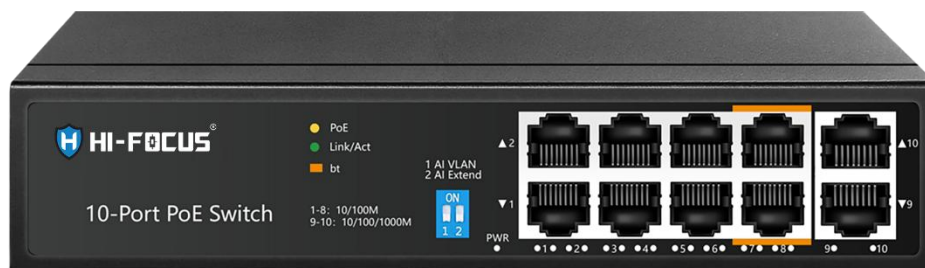

An ISO 9001:2008 Certified Company

## Specifications :

Networking Ports	8*10/100Mbps PoE RJ45 ports (port1~port8) 2*10/100/1000Mbps RJ45 ports (port9~port10)
Network Standard	IEEE 802.3i, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt
Performance	Bandwidth: 5.6Gbps Packets Forwarding Rate: 4.16Mpps MAC table size: 1K Forwarding type: Storage and Forwarding
LED	Power Indicator LINK/ACT Indicator PoE Indicator
PoE	1/2(+), 3/6(-)
POWER	Port 7-8 max power: 60W PoE budget: 120W
Dimension	WxDxH: 210mmx152mmx40mm
Environment	Working Temperature: 0 ° ~ 40°C Storage Temperature: -40°C~70°C Working Humidity: 10% ~ 90% RH nun-condensing Storage Humidity: 5% ~ 90% RH nun- condensing



An ISO 9001:2008 Certified Company