


## HD-XVR-5104TLC



### Product Features

- 4 CH Support AHD/ TVI / CVI 5MP/4MP/1080P/720P/WD1 video input
- Adopt standard H.265 High Profile Compression Format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface ( GUI ), window style operation by mouse, Multi-mode recording: manual / timer / motion
- Playback : 4 CH imultaneously playback
- Search: time slice, time, event, tag search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol, IE browser and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network Transmission and remote surveillance with mobile device
- Support 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QR Code scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with IOS and Andriod OS

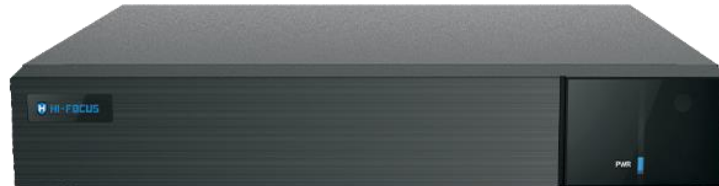

An ISO 9001:2008 Certified Company

## Specifications :

### SYSTEM

OS Embedded Linux

### VIDEO

Incoming Bandwidth 16Mbps  
 Outgoing Bandwidth 40Mbps  
 Video Compression H.264/H.265  
 IP Video Input 2CH, Up to 5MP@25fps  
 Analog Video Input BNC×4  
 BNC interface (1.0Vp-p; 75Ω)  
 Input Resolution AHD/CVI/ TVI : 5MP/ 4MP/1080P/1080P Lite/720P/  
 720P Lite/WD1  
 Output HDMI×1:1920×1080/1280×1024/1024×768  
 VGA×1:1920×1080/1280×1024/1024×768  
 BNC×1: CVBS (used as the main or spot output)  
 Multi-screen Display 1/4/6/9

### AUDIO

Local Audio Input RCA ×1  
 2-way Audio Take up Channel One Audio Input  
 Local Output RCA × 1 (linear, 600Ω)  
 Compression G.711(U/A)

### RECORD

Resolution 5MP Lite/4MP Lite/1080P/1080P Lite/720P/WD1  
 Local Record Frame Rate 5MP Lite :10fps; 4MP Lite/1080P : 12fps (PAL)/15fps (NTSC);  
 1080P Lite/720P/WD1 : 25fps (PAL)/30fps (NTSC)  
 Bite Stream 32Kbps - 4Mbps

### PLAYBACK

Simultaneous Playback 4 CH  
 Search Time slice / time / event / tag search  
 Smart Search Highlight colors to display the camera record in a certain period  
 of time, different colors refer to different record events  
 Function Play, pause, FF, FB, digital zoom, etc



An ISO 9001:2008 Certified Company

### **ALARM**

Mode Manual, motion, exception, smart event

### **NETWORK**

Interface RJ45 10/100Mbps × 1  
Network Protocol TCP/IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPs, NTP, SMTP  
Client Connection Max. 5 users access

### **MOBILE DEVICE**

OS iOS, Andriod

### **STORAGE**

HDD SATA×1, upto 10TB

### **BACK UP**

Local Backup U disk, USB mobile HDD  
Network Backup Yes

### **PORT**

RS 485 RS 485 × 1 (half-duplex)  
USB USB2.0×2 (in the rear panel)  
Remote Controller Optional

### **ENVIRONMENTAL**

Power Supply DC12V/1.5A  
Power Consumption ≤ 5W (without HDD)  
Working Environment -10 ~ 50 °C, 10%~90% humidity  
Dimensions (mm) 255× 222× 42 (W × D × H )



An ISO 9001:2008 Certified Company